


Tracker GTS-200


Turvaseurantalaite – Safety Tracking Device

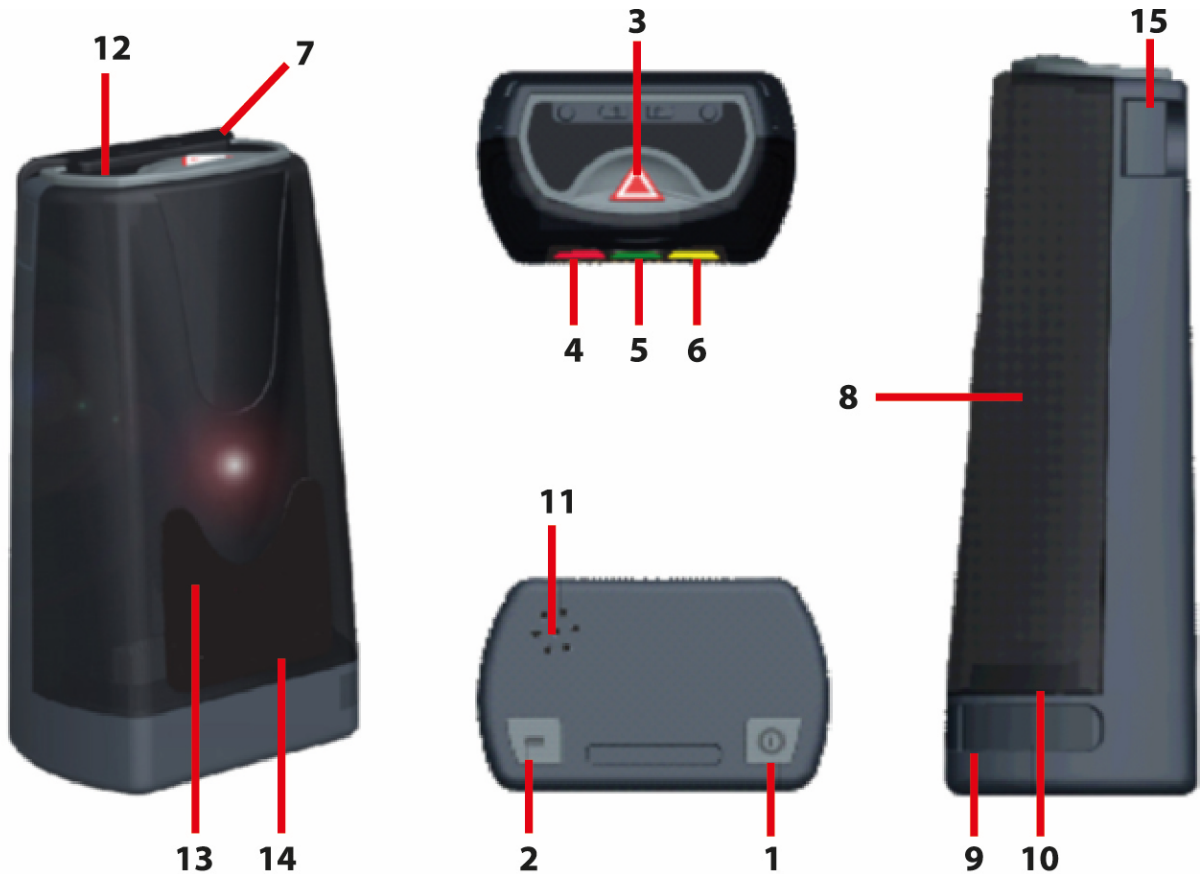

1. Pälle/pois – On/Off
2. Toimintopainike – Features button
3. Hätäpainike – Panic button
4. Punainen LED: laite ei valmis – Red LED: device not ready
5. Vihreä LED: vilkkuu = GSM-yhteys; palaa = ei GSM-yhteyttä
Green LED: blinks = GSM connected; light on all the time = no GSM connection
6. Kelt. LED: satelliittiyhteyden merkkivalo – Yellow LED: satellite connection indicator
7. GSM-antenni laitteen yläosassa – GSM-antenna on top of device
8. GPS-antenni laitteen keskellä – GPS antenna in the middle of the device
9. Latausliitin – Charger connection
10. Latauksen merkkivalo – Charger indicator LED
11. Mikrofoni – Microphone
12. Kaiutin – Loudspeaker
13. GSM-moduuli – GSM module
14. Akku – Battery
15. Akun irroitus – Battery release

Safety Tracker Installation

The trackers are delivered in a small bag, which can be used for the installation to rollcage bars with the Velcro strap of the bag, with cable ties, duct tape or similar devices.

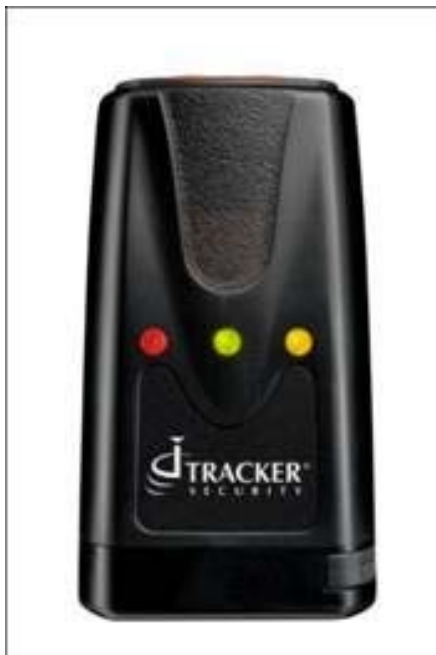

The device must be switched on by pushing the power switch (1) for at least 2 seconds with a pen or equivalent. When turned on, all LEDs will light for a while. Then they go off and the green LED will blink indicating GSM connection.

These lights do not concern the competitor as such, as long as you remember to control that the official has switched on the power on delivery.

Independent whether the unit will be installed vertically or horizontally, it is important to check that the GPS antenna is pointing up towards the sky (see picture on front page). If the antenna points to the side, it is not so dangerous, but definitely avoid pointing it towards the ground.

Please install the unit as far from the helmet intercom as possible, to avoid unnecessary disturbance (similar to GSM phone disturbance). Recommended places are any vertical or diagonal bars close to the rear or side windows.

Emergency switch



The tracking device will be delivered with an emergency switch, which can be used to send an SMS to Rally Control Centre. There are two buttons on the switch. You may press any one of these to send the message. **Emergency message may only be sent if a crew member or any third person has been injured and needs immediate medical attention.**

The emergency switch must be placed in the car so that both crew members can reach to it without opening or loosening their safety belts! The switch will be delivered with some 3M DualLock tape to be used for fastening the switch to the car. After the rally, you can leave

the tape to the car, ready for next event, but the switch must be returned together with the tracking device.